94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

TERMINATIONS

Model RMTE.3000.716m50 — 50W, 7/16 male

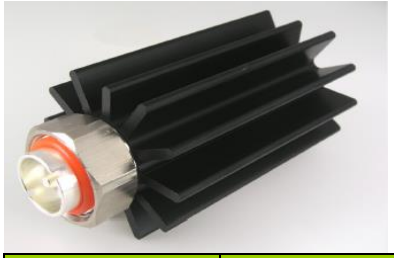

Frequency	Power	Impedance	VSWR	Connector
DC-3000MHz	50 watts avg	50 Ω	1.20:1 max	7/16 male per IEC169-4

Notes:

a. **Case Materials/Plating:**
   - **Housing: Brass w/nickel (optional ternary alloy)**
   - **Fins: Aluminum/black chromate**
   - **Center Contact: Brass/silver**
   - **Insulator: PTFE**
   - **O-ring: Silicone Rubber**

b. **Operation temperature: -45C to +60C deg**

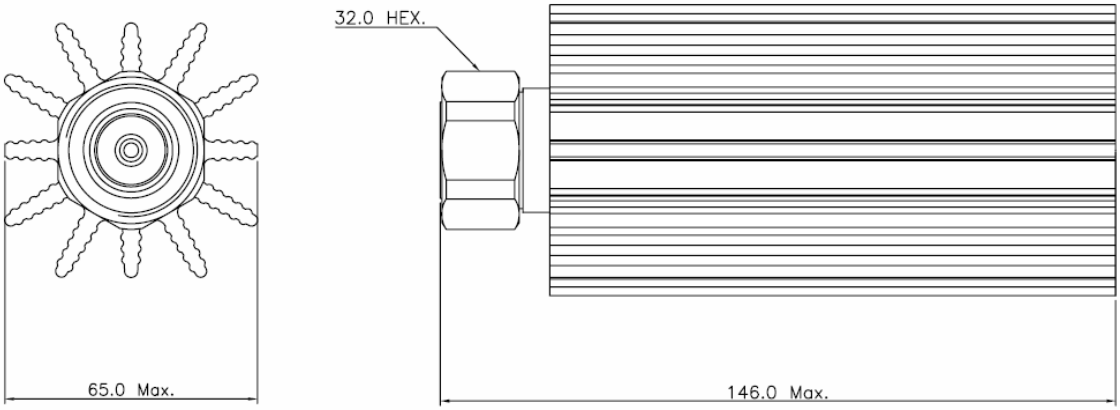

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com

Rev 7/25/05