



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

TERMINATIONS


Model RMTE.4000.SSMAf1

Screw-on, SSMA female

Frequency	Impedance	Power Input	VSWR
DC-4000MHz	50 Ω	1 W	1.20:1 max

Notes:

- Case Materials/Plating:
Housing: Brass/nickel
Center Contact: Gold plated BeCu
Dielectric: PTFE
- Operation temperature: -55C to +125C
- C suffix = 2" bead chain and eyelet

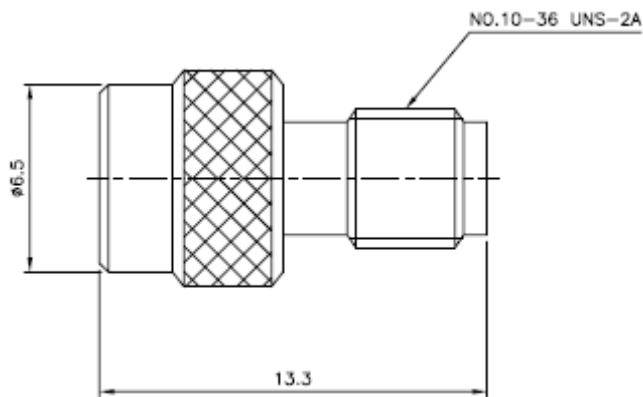

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com