



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

TERMINATIONS


Model RMTE.4000.SSMAm1

Screw-on, SSMA male

Frequency	Impedance	Power Input	VSWR
DC-4000MHz	50 Ω	1 W	1.20:1 max

Notes:

- a. Case Materials/Plating:
Housing: Brass/gold plate
Coupling Nut: Stainless/passivate
Center Contact: Gold plated BeCu
Dielectric: PTFE
- b. Operation temperature: -55C to +125C
- c. C suffix = 2" bead chain and eyelet

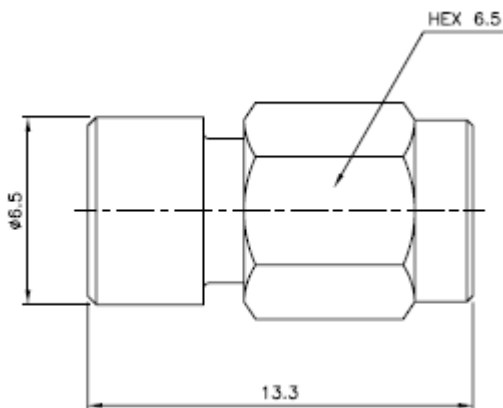

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com