94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

TERMINATIONS

Model RMTE.40000.SMPf — SMP female

Frequency	Power	VSWR	Impedance
DC-40000MHz	0.5 watt CW 100W peak	1.60:1 max	50 Ω

Notes:

a. **Case Materials/Plating:**
   Housing: 303 stainless/passivate
   Center Contact: BeCU/gold
   Insulator: PTFE

b. **Operational temperature: -55°C to +125°C**

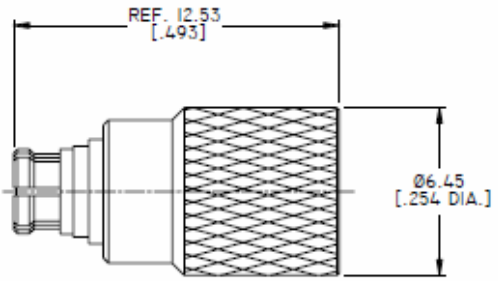

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com