94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

TERMINATIONS

Model RMTE.50000.24m0.5 2.4mm male

Frequency	Power	Impedance	VSWR	Connector
DC-50000MHz	0.5 watt	50 Ω	1.25:1 max	2.4mm male

Notes:

a. **Case Materials/Plating:**
   Housing: 303 stainless/passivate
   Center Contact: BeCU/gold
   Insulator: PEI

b. **Operation temperature: -40°C to +120°C**

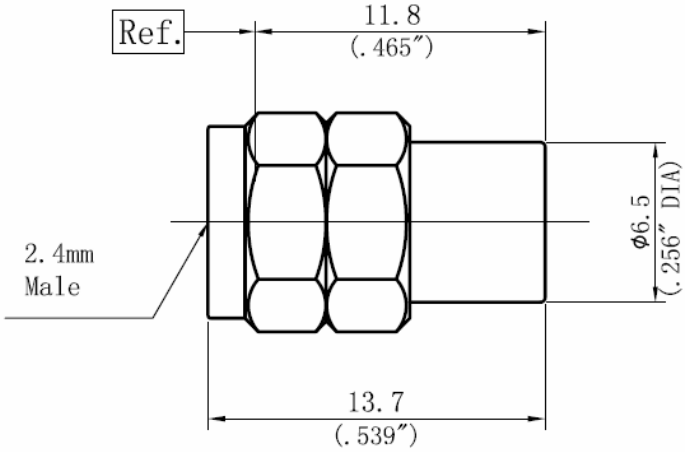

All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com

Rev 7/25/05