94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

TERMINATIONS

Model RMTE.6000.MCXm MCX male

Frequency	Power Avg	Impedance	VSWR
DC-6GHz	1 W	50Ω	1.25:1max

Notes:

a. **Operation temperature: -55°C to +125°C**
b. **Dimensions in mm**

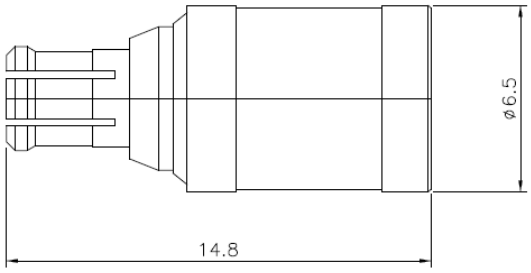

1 = Body – Brass/gold
2 = Dielectric – PTFE
3 = Center Contact – BeCu/gold

All specifications are subject to change without notice

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com

Rev 2/6/14