94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

TERMINATIONS

Model RMTE.6000Nf150 N female, 150W

Frequency	Power Average	Power Peak	Impedance	VSWR
DC-6 GHz	150 watts	1Kw	50Ω	1.20:1 max

Notes:

a. **Case Materials/Plating:**
   Housing: aluminum/black anodize
   Center Contact: BeCu/Gold
   Dielectric: PTFE
b. **Operation temperature: -55°C to +125°C**
c. **Power rated at 25°C and derated linearly to 0W at 125°C**

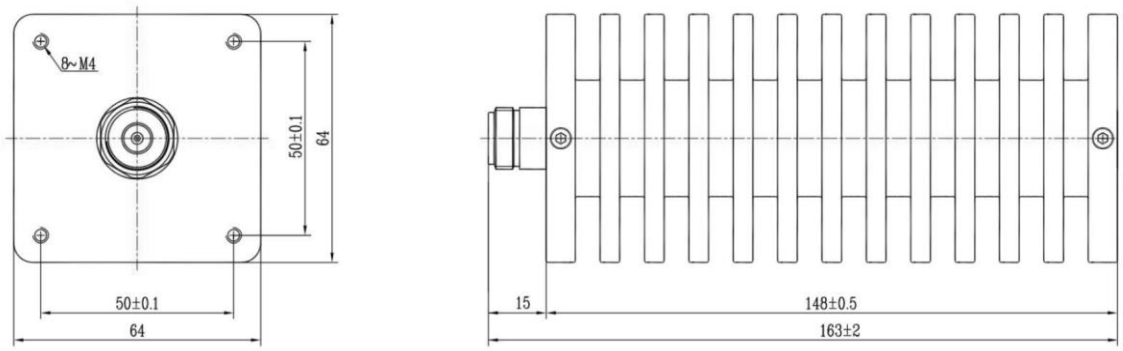

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com

Rev 10/2/15