94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

TERMINATIONS

Model RMTE.6000Nf5 Screw-on, N female

Frequency	Power Nominal	Power Peak	Impedance	Return Loss
DC-6000MHz	5 watts	1Kw/50us	50Ω	1.20:1 max

Notes:

a. **Case Materials/Plating:**
   Housing: Brass/nickel
   Center Contact: BeCu/Gold
   Resistive element: Thin film
   Resistor substrate: Alumina
   Dielectric: PTFE
b. **Operation temperature: -55°C to +125°C**
c. **Add a "c" suffix for optional bead chain**

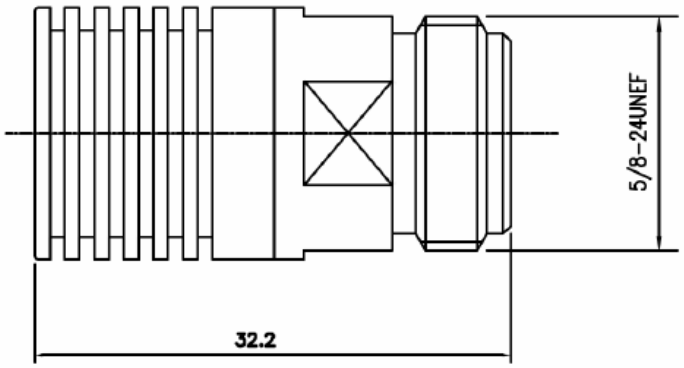

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com

Rev 10/2/15