94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

TERMINATIONS

Model RMTE.6000.Nm2 — Screw-on, N male

Frequency	Power Nominal	Power Peak	Impedance	Return Loss
DC-6000MHz	2 watts	1Kw/50us	50Ω	DC-4GHz : 32dB 4-6GHz : 25dB

Notes:

a. **Case Materials/Plating:**
   - **Housing: Brass w/ternary alloy**
   - **Center Contact: Gold plated brass per MIL-G-45204**
   - **Resistive element: Thin film**
   - **Resistor substrate: Alumina**

b. **Operation temperature: -55°C to +125°C**

c. **Add a "c" suffix for optional bead chain**

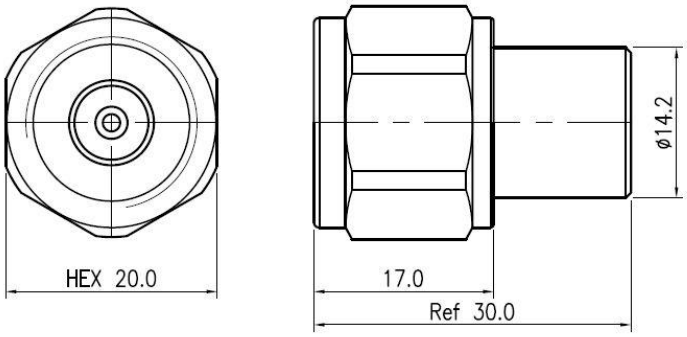

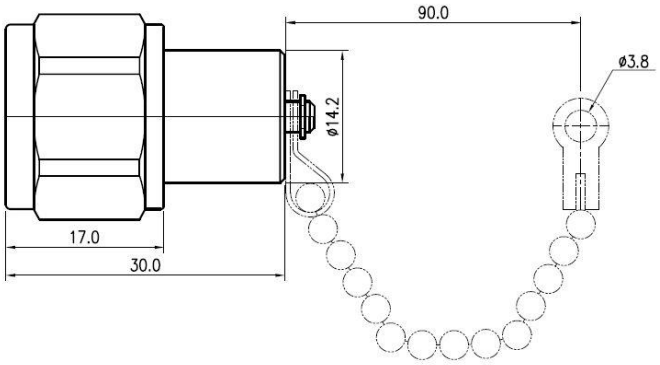

All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com

Rev 7/25/05