



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

TERMINATIONS


Model RMTE.6000Nm5

Type N male

Frequency	Power Average	Power Peak	Impedance	VSWR
DC-6 GHz	5 watts	1Kw/50us	50Ω	1.20:1 max

Notes:

- a. Case Materials/Plating:
 Housing: Brass w/ternary alloy plate
 Center Contact: BeCu/Gold
 Resistive element: Alumina/Thin film
 O-ring: Silicone rubber
 Dielectric: PTFE
- b. Operation temperature: -65°C to +85°C

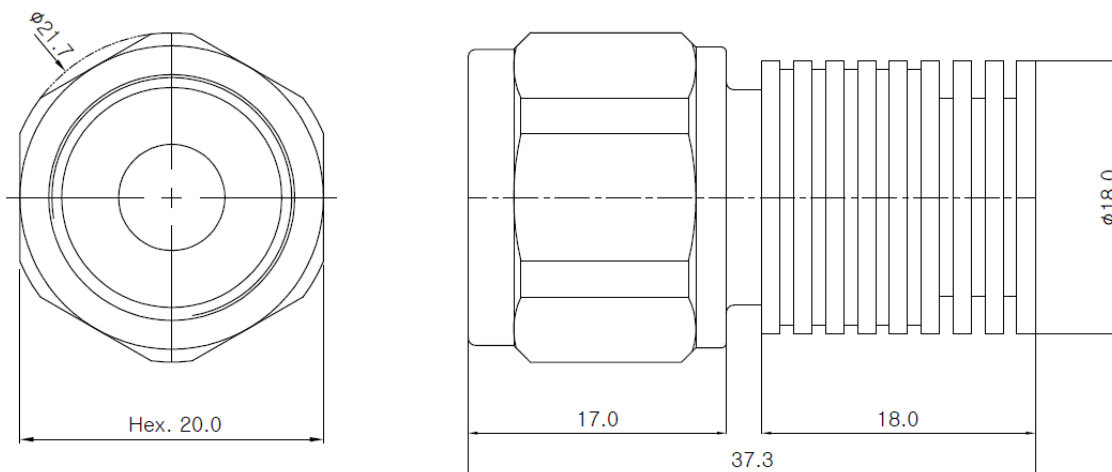

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com