



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

TERMINATIONS


Model RMTE.6000.SMAm20

20W, SMA male

Frequency	Power Avg	Impedance	VSWR
DC-6000MHz	20 W	50ohm	1.25:1max

Notes:

- a. Case Materials/Plating:
Fins: Aluminum black anodize
Body: brass/nickel
Center Contact: Gold plated Brass
Connector: Stainless Steel/passivate
Resistive element: Thin film/alumina
- b. Operation temperature: -55°C to +125°C

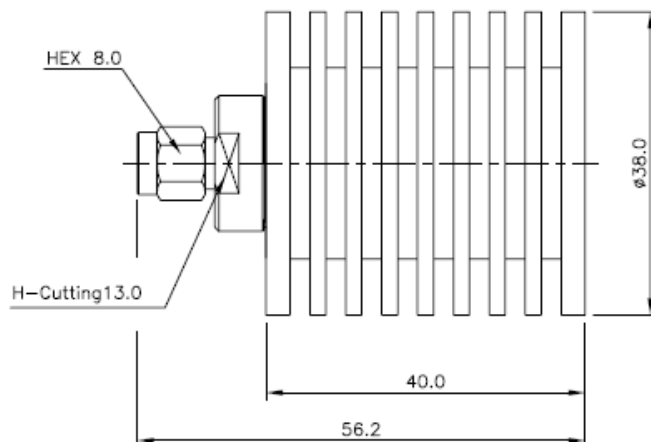

Dimensions in mm. All specifications are subject to change without notice

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com