94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

TERMINATIONS

Model RMTE.6000Sm10a SMA male, 10W

Frequency	Power	Impedance	VSWR
DC-6000MHz	10 W avg	50Ω	1.25:1 max

Notes:

a. **Case Materials/Plating:**
   - **Housing: Aluminum/black anodize**
   - **Connector shell: SS/P**
   - **Center Contact: Gold plated BeCu**
   - **Dielectric: PTFE**
   - **Resistive element: Ceramic rod**

b. **Power rated at 25° C ambient, derate linearly to 1W at 100° C**

c. **Operation temperature: -55°C to +100°C**

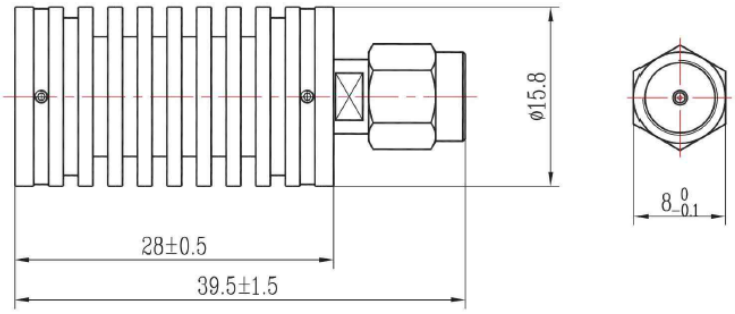

Dimensions in mm. All specifications are subject to change without notice

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com