94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

TERMINATIONS

Model RMTE.6000.Sm2 SMA male, 2W

Frequency	Power	Impedance	VSWR
DC-6000MHz	2 W avg	50Ω	1.20:1 max

Notes:

a. Case Materials/Plating:
- **Housing: Brass/nickel**
- **Connector shell: Brass/nickel**
- **Center Contact: Gold plated BeCu**
- **Dielectric: PTFE**
- **Resistive element: Ceramic rod**

b. Operation temperature: -55°C to +85°C

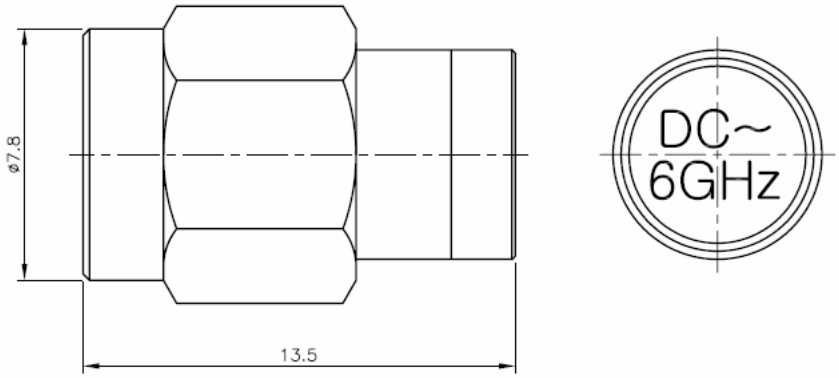

Dimensions in mm. All specifications are subject to change without notice

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com

Rev 5/30/15