



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

TERMINATIONS


Model RMTE.8000.Nm2

Screw-on, N male

Frequency	Power Nominal	Power Peak	Impedance	VSWR
DC-8000MHz	2 watts	1Kw/50us	50Ω	DC-4GHz : 1.05:1max 4-8GHz : 1.10:1 max

Notes:

- Case Materials/Plating:
Housing: Brass w/ternary alloy
Center Contact: Gold plated brass per MIL-G-45204
Resistive element: Thin film
Resistor substrate: Alumina
- Operation temperature: -55°C to +85°C
- Add a "c" suffix for optional bead chain

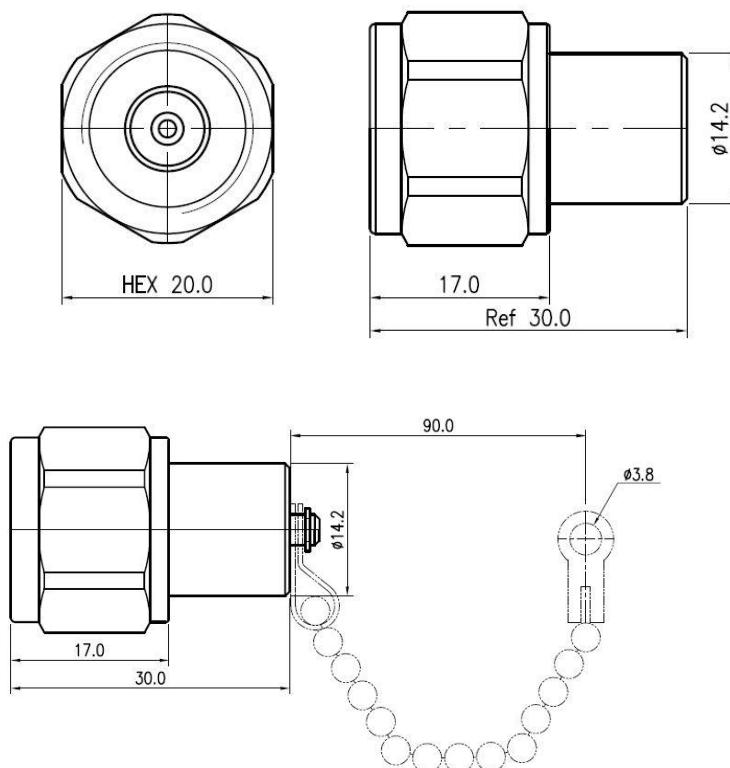

Dimensions in mm. All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com