



94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

TERMINATIONS


Model RMTE.8000.Nm50

Screw-on, 50ohm, N male

Frequency	Power Nominal	Power Peak	Impedance	VSWR
DC-8000MHz	50 watts	1Kw/50us	50ohm	1.30:1 max

Notes:

- a. Case Materials/Plating:
 - Housing: Brass/nickel
 - Fins: aluminum/black anodized
 - Center Contact: Gold plated brass per MIL-G-45204
 - Resistive element: Thin film
 - Resistor substrate: Alumina
- b. Operation temperature: -55C to +125C

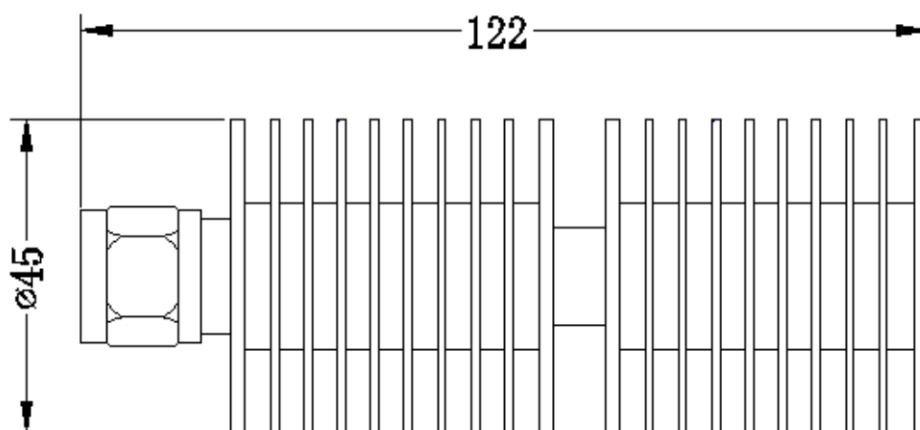

All specifications are subject to change without notice.

Telephone: 978-772-3767

Fax: 978-772-3768

www.responsemicrowave.com