94 JACKSON ROAD SUITE 110 DEVENS, MA 01434

TERMINATIONS

Model RMTE.8000Nm5a — 5W, N male

Frequency	Power	Impedance	VSWR	Weight
DC-8000MHz	5 watts avg 0.25KW peak	50Ω	1.2:1max	50 grams

Notes:

a. Case Materials/Plating:
   Housing: Brass w/ternary plate
   Center Conductor: BeCu w/gold plate
   Insulator: PTFE
b. Operation temperature: -65°C to +125°C
c. Average power is derated linearly to 0.5W at 125°C
d. Peak Power is based on 5 usec pulse, 1% duty cycle

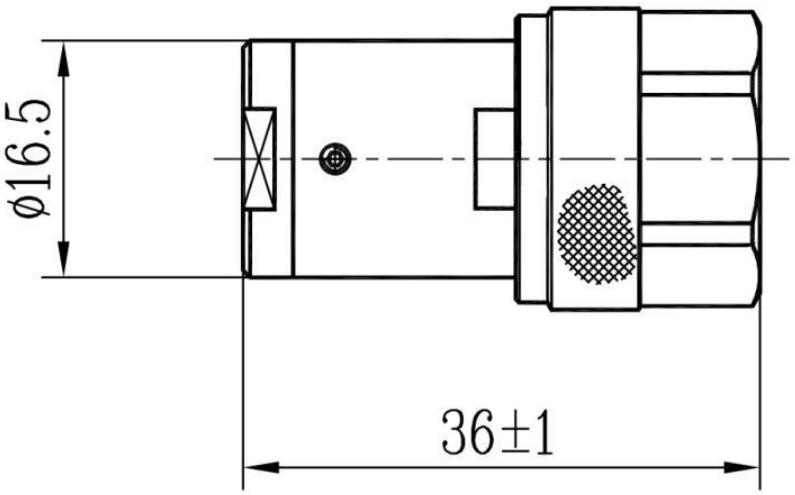

Telephone: 978-772-3767 Fax: 978-772-3768

www.responsemicrowave.com

Rev 7/25/12

RESPONSE MICROWAVE, INC.

94 JACKSON ROAD SUITE 110 DEVENS, MA 01434

All specifications are subject to change without notice.

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com

Rev 7/25/12