94 JACKSON ROAD, SUITE 110, DEVENS, MA 01434

TERMINATIONS

Model RMTE.8000.SMAm5 SMA male, 5W

Frequency	Power	Impedance	VSWR
DC-8000MHz	5 W avg	50Ω	1.2:1 max

Notes:

a. **Case Materials/Plating:**
   Housing: Brass/nickel
   Connector shell: SS/P
   Center Contact: Gold plated BeCu
   Dielectric: PTFE
   Resistive element: Ceramic rod

b. **Operation temperature: -55°C to +125°C**

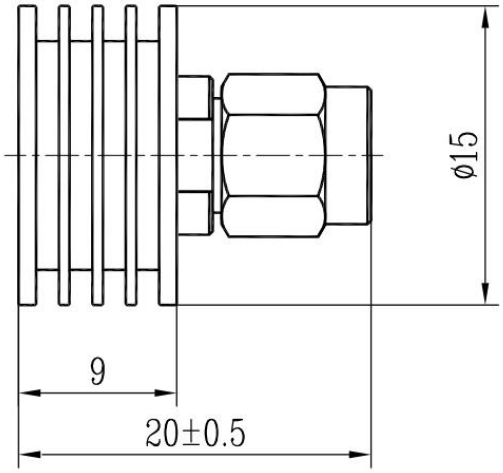

Dimensions in mm. All specifications are subject to change without notice

Telephone: 978-772-3767 **Fax: 978-772-3768**

www.responsemicrowave.com

Rev 6/10/19