



SMA SERIES (DC-26.5GHz) INTERFACE DIMENSIONS

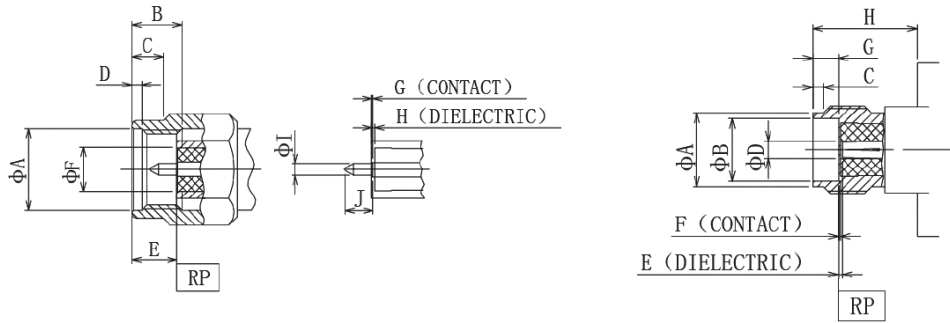

SMA Male (mm)		
LTR	MINIMUM	MAXIMUM
A	6.5	6.6
B	4	4
C	2.5	2.5
D	0.8	0.8
E	2.97	3.28
F	3.48	3.52
G	0	0.198
H	0	0.178
I	0.920	0.934
J	2.09	2.15

SMA Female (mm)		
LTR	MINIMUM	MAXIMUM
A	5.324	5.400
B	4.60	4.63
C	0.9	0.9
D	1.25	1.28
E	0	0.178
F	0	0.198
G	1.855	1.993
H	5.3	-

TYPE N18 SERIES (DC-18GHz) INTERFACE DIMENSIONS

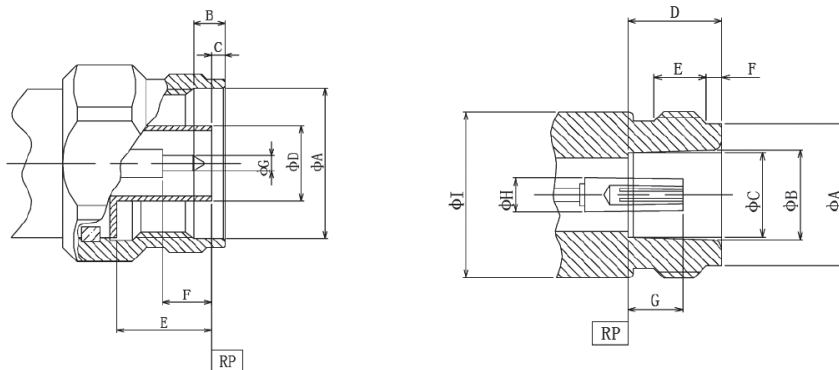


N MALE (mm)		
LTR	MINIMUM	MAXIMUM
A	15	17
B	3.3	3.5
C	1.3	1.55
D	8	8.035
E	10.1	10.3
F	5.36	5.46
G	1.62	1.65

N Female (mm)		
LTR	MINIMUM	MAXIMUM
A	13.4	13.6
B	8.5	8.7
C	8.05	8.086
D	8.88	9.16
E	4.9	5.1
F	1.4	1.6
G	5.16	5.26
H	3.025	3.055
I	15.75	15.88




TNC18 SERIES (DC-18GHz) INTERFACE DIMENSIONS

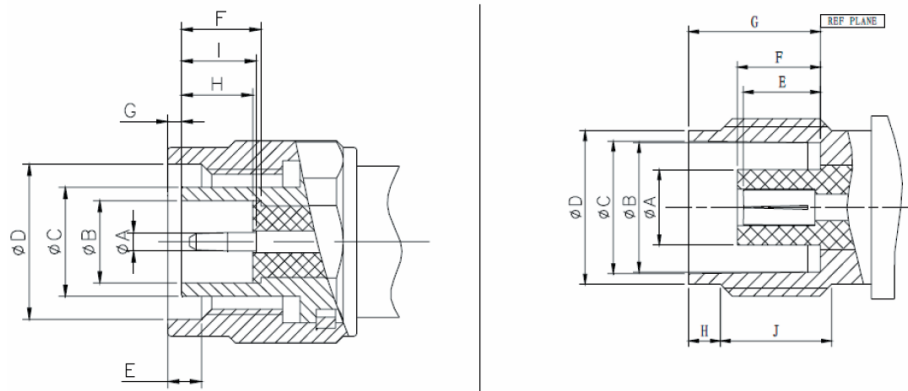

TNCA MALE (mm)		
LTR	MINIMUM	MAXIMUM
A	1.32	1.37
B	6.05	6.15
C	7.98	8.08
D	11.18	-
E	1.60	-
F	5.38	-
G	-	1.98
H	5.28	-
I	5.28	-


TNCA Female (mm)		
LTR	MINIMUM	MAXIMUM
A	4.62	4.72
B	8.10	8.15
C	8.31	8.46
D	9.60	9.68
E	5.03	5.28
F	5.03	5.28
G	8.31	8.51
H	1.73	2.24
J	4.75	-

SSMA SERIES (DC-33GHz) INTERFACE DIMENSIONS

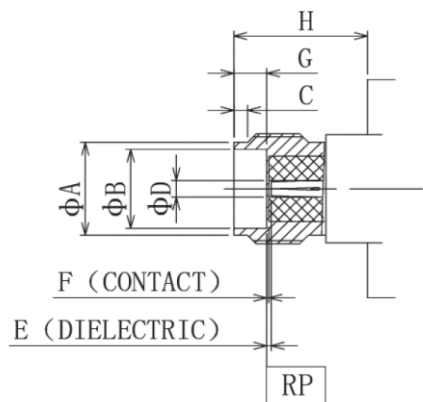

SSMA Female (mm)		
LTR	MINIMUM	MAXIMUM
A	3.85	4.05
B	3.23	3.28
C	0.9	1.1
D	0.8373	0.8627
E	0	0.03
F	0	0.04
G	1.79	1.81
H	7.8	8.0


2.92mm SERIES (DC-40GHz) INTERFACE DIMENSIONS

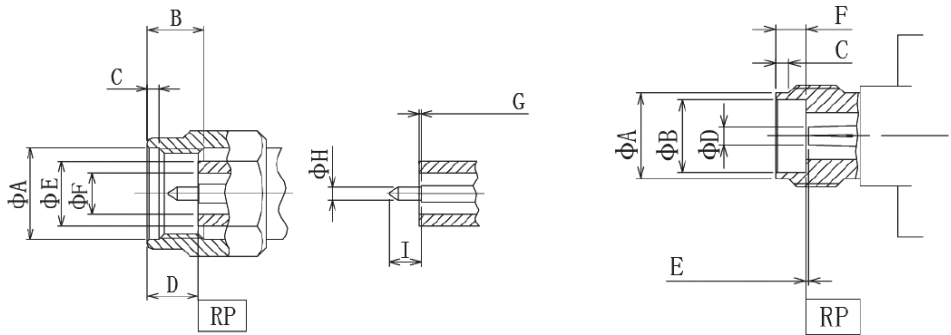

2.92mm MALE (mm)		
LTR	MINIMUM	MAXIMUM
A	6.5	6.6
B	4.0	4.0
C	0.8	0.8
D	2.82	3.18
E	4.55	4.58
F	2.90	2.94
G	0	0.06
H	0.920	0.934
I	1.295	1.450

2.92mm Female (mm)		
LTR	MINIMUM	MAXIMUM
A	5.324	5.400
B	4.60	4.63
C	0.8	0.9
D	1.26	1.28
E	0	0.078
F	1.855	1.993
G	5.3	-

2.4mm SERIES (DC-50GHz) INTERFACE DIMENSIONS

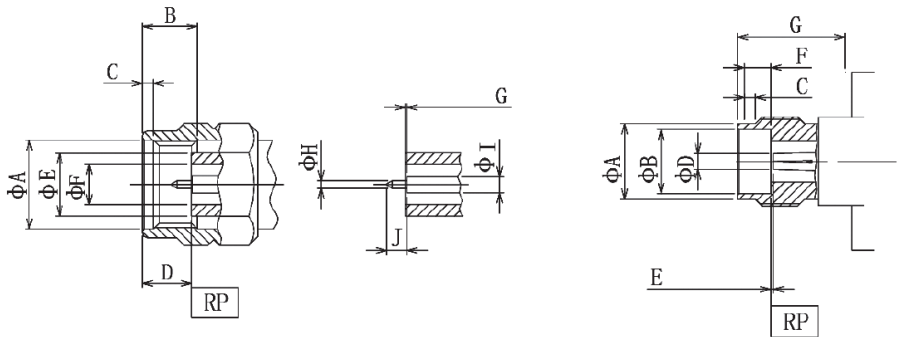

2.4mm MALE (mm)		
LTR	MINIMUM	MAXIMUM
A	7.05	7.15
B	4.0	4.0
C	0.8	0.8
D	1.7	1.9
E	4.725	4.750
F	2.385	2.415
G	0	0.055
H	0.49	0.51
I	1.032	1.052
J	1.305	1.45

2.4mm Female (mm)		
LTR	MINIMUM	MAXIMUM
A	5.7	5.9
B	4.770	4.795
C	1.4	1.6
D	1.12	1.14
E	0	0.055
F	3.00	3.08
G	6.4	-





WWW.RESPONSEMICROWAVE.COM